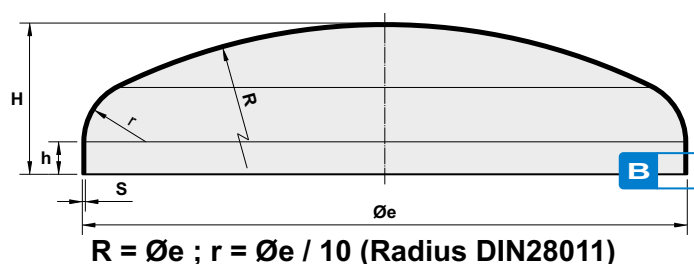
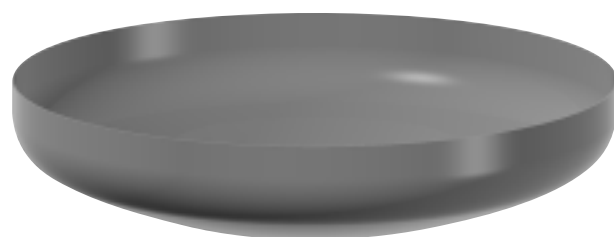








Øe	H	R	r	*h	S	*V	**P
mm	mm	mm	mm	mm	mm	dm ³	Kg/mm
240	70	240	24	22	2 ÷ 2,5	2,2	0,6
260	75	260	26	18	2 ÷ 3	2,5	0,6
273	80	273	27,3	26	2 ÷ 5	3,3	0,7
280	75	280	28	19	2 ÷ 3	3,2	0,7
300	83	300	30	23	2 ÷ 4	4,1	0,9
310	90	310	31	28	2 ÷ 2,5	4,8	0,9
315	90	315	31,5	28	2 ÷ 3	5	1
320	80	320	32	16	3 ÷ 5	4,1	0,9
324	90	324	32,4	26	4 ÷ 6	5,2	1
350	90	350	35	21	2 ÷ 5	6	1,1
360	90	360	36	24	2 ÷ 3,5	6,7	1,2
380	100	380	38	25	2 ÷ 4	7,9	1,3
390	90	390	39	13	2 ÷ 4	7,1	1,3
400	110	400	40	31	2 ÷ 5	9,8	1,5
430	105	430	43	20	2 ÷ 3,5	10,4	1,6
450	118	450	45	29	2 ÷ 6	13,2	1,9
480	130	480	48	35	2 ÷ 5	16,8	2,2
500	135	500	50	37	2 ÷ 6	19	2,4
530	145	530	53	40	2,5 ÷ 4	23	2,7
550	145	550	55	37	2 ÷ 5	24,5	2,8
560	145	560	56	35	2 ÷ 4	25,3	2,9
580	145	580	58	31	3 ÷ 4	26,8	3
600	150	600	60	32	2 ÷ 6	29,7	3,2
610	150	610	61	30	2,5 ÷ 4	30,5	3,3
630	160	630	63	36	2 ÷ 6	35,2	3,6
650	160	650	65	33	2 ÷ 6	37	3,8
700	170	700	70	33	2,5 ÷ 5	45,5	4,3
750	180	750	75	33	2 ÷ 5	55,2	4,9
790	180	790	79	25	2 ÷ 5	60	5,3
800	190	800	80	33	2 ÷ 7	66,1	5,6
850	200	850	85	34	2,5 ÷ 5	78,4	6,3
900	205	900	90	29	2,5 ÷ 5	89	6,9
950	225	950	95	39	2,5 ÷ 6	110,9	7,9
1000	245	1000	100	50	2,5 ÷ 6	135,8	8,9
1100	260	1100	110	45	2,5 ÷ 5	172,2	10,5
1200	290	1200	120	56	3 ÷ 5	231,2	12,7
1250	295	1250	125	51	3 ÷ 5	252,9	13,6
1270	280	1270	127	33	3 ÷ 5	240,8	13,4
1300	310	1300	130	57	3 ÷ 6	289,2	14,8
1400	340	1400	140	68	3 ÷ 6	371,1	17,4
1500	350	1500	150	58	3 ÷ 6	431,9	19,5
1600	370	1600	160	59	3 ÷ 6	518,1	22
1800	385	1800	180	34	4 ÷ 5	633	26,5


Tipo di bordatura eseguibile

Type of beading that can be formed

I fondi possono essere stampati in acciaio al carbonio o inox.

Su richiesta si possono eseguire spessori e altezze diverse da quelle indicate a catalogo e lavorazioni supplementari di foratura, slabbratura e flangiatura (vedi pag. 8/10).

* La quota "h" e la capacità "V" sono state calcolate per fondi rifilati con "S" = 3 mm
 ** Il peso teorico riportato è da moltiplicare per lo spessore in mm

The dishes can be pressed in carbon steel and in stainless steel.

Heights and thicknesses different from those shown in the catalogue on request. Supplementary drilling, swelling and flanging processes on request (see page 8/10).

* The "h" dimension and the "V" capacity were calculated for trimmed dished heads with "S" = 3 mm
 ** The theoretical weight that is indicated must be multiplied by the thickness in mm